


► Our technology. Your success.

Pumps • Valves • Service



Vitalobe® – Rotary Lobe Pump for Sterile Applications

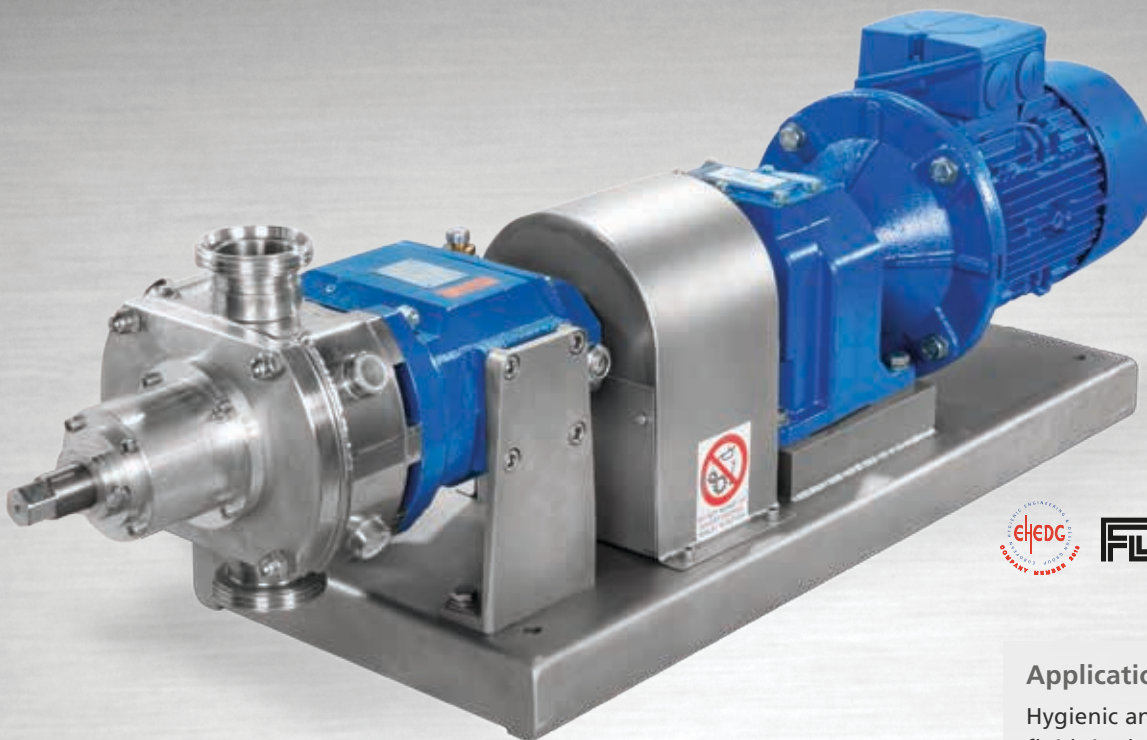


Applications:

Hygienic and sterile handling of fluids in the food, beverage and pharmaceutical industries

More information:

www.ksb.com/products

Vitalobe® – Rotary Lobe Pump for Sterile Applications

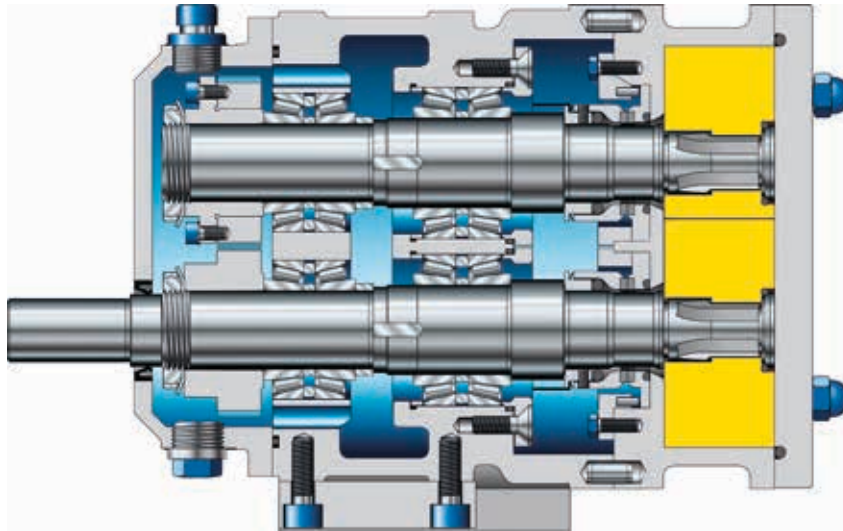

- **Suitable for hygienic applications**
 - Rotors and casing cover fastened without gaps and specially designed shaft seal ensure excellent CIP/SIP.
 - Pump casing separated from bearing bracket to avoid contamination of the fluid handled.
- **Flexibel**
 - Connections may be positioned horizontally or vertically.
 - Bi-directional flow possible.
 - Different rotor types matched to the respective fluid to be handled.
 - Different process connections available.

- **Robust and reliable**
 - Solid pressure-retaining and moving components.
 - Drive shaft supported on two tapered roller bearings and gear unit ensuring fully synchronised running of shafts make for long service life and avoid rubbing contact of rotors.
- **Adaptable**

Thanks to the heatable casing, double mechanical seal, removal of residues and safety pressure relief valve the pump can be adapted to any application.

Materials

All wetted components	Chrome nickel molybdenum steel DIN 1.4404 / 1.4409 (AISI 316 L / CF3M) On request: Hastelloy C276, titanium, EPDM or NBR coated (rotors only), stainless steel sliding alloy (rotors only)
Bearing bracket and gear housing	Grey cast iron, powder-coated or nickel-plated, Stainless steel ASTM CF8

Technical data

	17 pump sizes
Flow rate	Up to 5,700 l/min (342 m ³ /h)
Head	Up to 200 m
Operating pressure	Up to 20 bar
Fluid temperature	-40 to +180 °C
Viscosity	Up to 200,000 mPas
Volume displaced	Up to 11.4 l per revolution



KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com